


# Small Turning Rolls



**ProStar™ PRS P Series**



The P Series features a load range of 1,500 pounds to 10,000 pounds. Designed for smaller capacity applications, ProStar small turning rolls provide the same reliability and endurance as larger models!

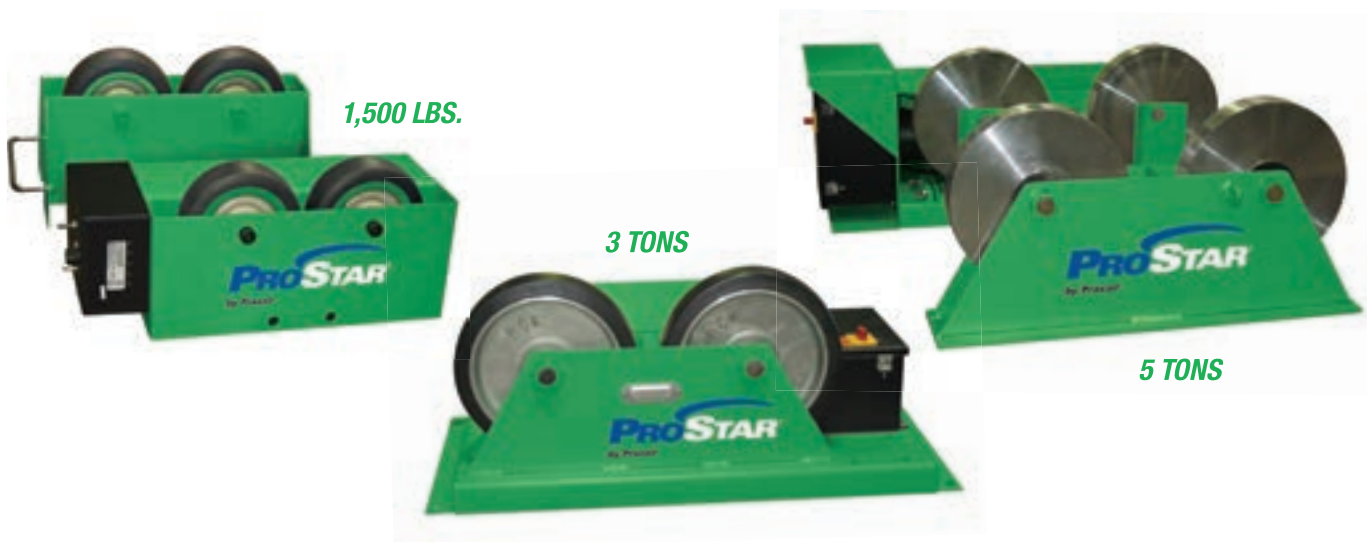

SPECIFICATIONS	3/4-TON TURNING ROLL	3-TON TURNING ROLL	5-TON TURNING ROLL
TURNING CAPACITY (SYSTEM)	1,500 lbs.	4,000 lbs.	5,000 lbs.
POWER ROLL PART NO.	PRSMINIPPR	PRS3TPPR	PRSSUPER5TPPR
IDLER ROLL PART NO.	PRSMINIPR	PRS3TPIR (2 required)	PRSSUPER5TPR
PIPE DIAMETER RANGE	2 in. - 16 in.	3-1/2 in. - 40 in.	10 in. - 48 in.
FOOTPRINT	15-3/8 in. × 7-3/8 in. × 8-1/2 in.	35-5/8 in. × 18-1/16 in. × 15 in.	39 in. × 17 in. × 15 in.
WHEEL DIAMETER	6 in.	12 in.	12 in.
COMBINED WHEEL FACE	2 in.	2-1/2 in.	1-7/8 in.
OPERATION SPEED RANGE	10 in. / min. - 50 in. / min.	3.3 in. / min. - 66 in. / min.	9 in. / min. - 180 in. / min.

Specifications subject to change without notice. Consult your Praxair representative when ordering.

**Options & Accessories**

- Forward/stop/reverse foot switch
- Fast/slow foot switch
- Preset digital tachometer
- Steel wheels
- Overload discs
- Thrust rolls
- Anti-skewing system
- Spring-loaded casters

**STANDARD FEATURES**

- Solid-state pendant controlled
- Amphenol connections
- Variable speed control
- High-quality worm gear

